


O-Ring



O RINGS ARE TORUS OR DOUGHNUT SHAPED RINGS DEFINED BY THEIR INNER DIAMETER (I.D.) & CROSS SECTION (C.S.)

KRS PROVIDES QUALITY O RINGS FROM A SMALL AS 0.74 MM (I.D.) TO 1800 MM (I.D.) GIANT SIZES WITHOUT JOINTS (DIE MADE) IN ALL ELASTOMERS.

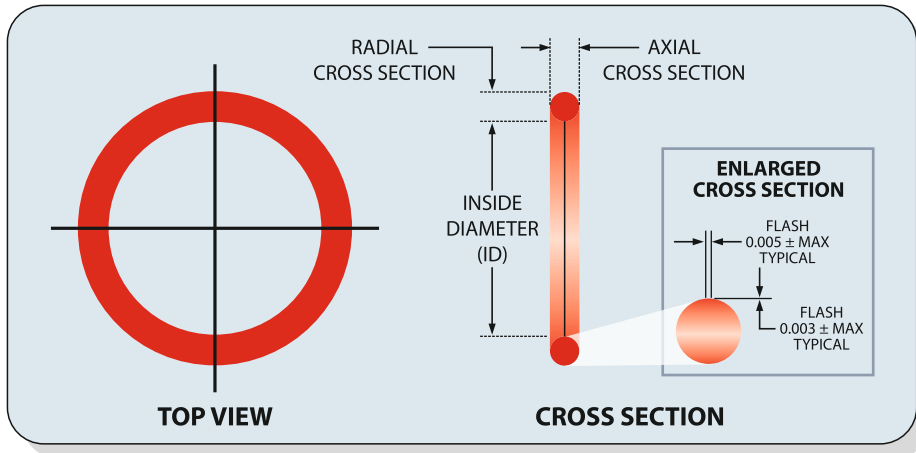

O RINGS ARE MANUFACTURED ACCORDING TO VARIOUS INTERNATIONAL STANDARDS VIZ. AS568 A, DIN 3771, BS 1806, SMS 1586, METRIC, JIS 2401, AMS, NAS, CUSTOM STANDARDS ETC.



ORING KITS REPRESENT EXCELLENT VALUE FOR MONEY IN TERMS OF QUANTITY, QUALITY & CONVENIENCE FOR MAINTENANCE ENGINEERS.

ORING KITS CONTAIN INCH SIZE, METRIC SIZE ORINGS & CORDS, POPULARLY KNOWN A SPLICING KITS.

WE ALSO ASSEMBLE SETS OF ORINGS, CORDS FOR REFURBISHMENT OF SPECIFIC EQUIPMENT AND CUSTOM BRAND THEM FOR YOU.

SPECIALIZED IN VITON® ELASTOMERS

- WE ALSO MANUFACTURE CUSTOM DESIGNS AS PER CUSTOMER SPECIFICATIONS.
- FOR MORE DETAILS ON SIZES AND DESIGN TYPE, KINDLY CONTACT US
- VITON® IS A REGISTERED TRADEMARK OF DUPONT